


SolaX Microinverter Accessories


Experience a hassle-free installation with easy, flexible, and reliable cable system

The SolaX microinverter cable system is a revolutionary cabling solution designed specifically for the X1-Micro 2 in 1 and X1-Micro 4 in 1 series microinverters, which offers a simple and hassle-free installation experience in a PV system with one or multiple microinverters. The plug-and-play design ensures quick and reliable setup, making it easy for users to install. With the flexibility to mix and match connection cables of different sizes and lengths, the intended wiring configuration can be accomplished at a cost-effective price.

Single-Microinverter Solution

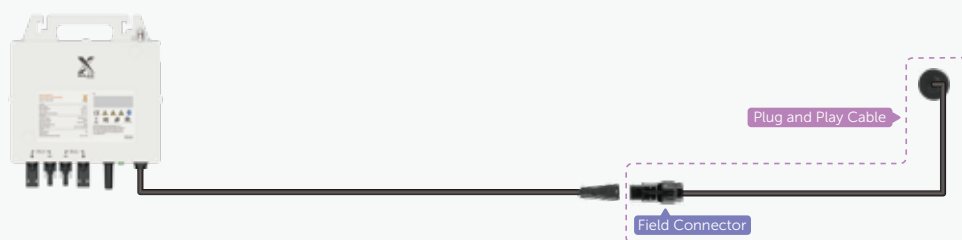

Multi-Microinverter Solution

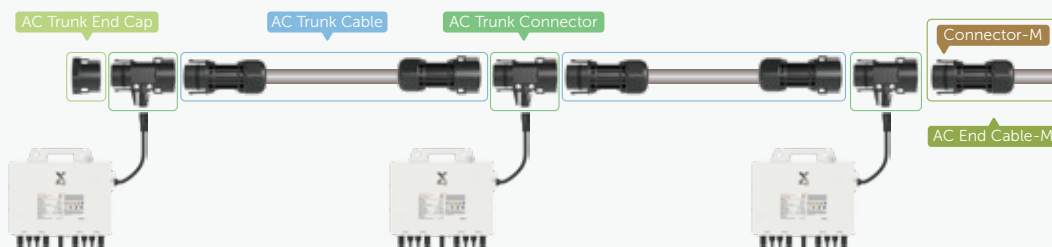

Contact Us for More Informations

www.solaxpower.com
Global: +86 571-56260008

AU: +61 1300 476529
DE: +49 6142 4091664

UK: +44 2476 586998
NL: +31 (0) 852 737932



Single-Microinverter Solution

Field Connector



The Field Connector is specifically designed for PV systems with a single microinverter. Used to form the Plug and Play Cable, which facilitates a fast and straightforward electrical connection between the microinverter and the grid, serving as a convenient joining component.

Plug and Play Cable



Plug and Play Cable is specifically designed for PV systems with a single microinverter. It consists of the field connector, AC cable, and plug. The field connector is connected to the microinverter connector, and the plug is connected to the household socket in accordance with local regulations.

Technical Specifications

Connector System Parameter

Pin number	2P + PE	
Rated voltage	300 V	
Rated current	12 A (Use 1.5 mm ² copper cable)	
Applicable cable specification	1.0 / 1.5 / 2.5 mm ²	
Applicable cable outer diameter	8.1 mm to 9.6 mm	
Cable connection type	screw pressing	
Ambient temperature range	-40°C to +85°C	
Dimensions (L × W × H)	64 × 28 × 28 mm	
Protection degree	IP68	
Flame resistance degree	UL94-V0	
Compliance	RoHS	
Product standard	EN 61984 / UL 6703	

Plug and Play Cable Parameter

Consisting components	Field Connector + Cable + AC plug	
Cable type	H07RN-F	
Conductors cross-sectional area	1.5 mm ²	1 mm ²
Cable outer diameter	10.1±0.3 mm	
AC Plug standard	EN 50525-2-21	
Rated voltage	250 V	
Rated current	12 A	10 A
Ambient temperature range	-40°C to +85°C	
Compliance	RoHS	

Ordering Options

Model	Cable Length Between Connector and AC Plug	Number per Box	Box Dimensions (mm)
Field Connector	/	200	460x340x250 mm
Plug and Play Cable-500	5m	20	460x340x250 mm

Multi-Microinverter Solution

 AC Trunk Cable Consist of an AC Trunk Connector-M, an AC Trunk Connector-F and an AC cable, to connect the AC Trunk Connector.	 AC Trunk Connector Consist of an AC Trunk Connector-M, an AC Trunk Connector-F and Microinverter connector, to connect the microinverter's AC output to the AC Trunk, as well as to join together multiple AC Trunk Cables to create the AC Trunk.
 Connector-M Used to form the AC cable into an AC End Cable or AC Trunk Cable, which completes the connection between the end of the AC Trunk and the distribution box.	 AC Trunk End Cap Used to protect vacant AC Trunk Connector - M.
 AC End Cable-M Consist of an AC Connector - M and a cable, to connect the microinverter branch to the distribution box.	 AC Trunk Port Disconnect Tool A versatile tool that can be used to take apart connectors, tighten nuts, and loosen nuts.
 Connector-F Used to form the AC cable into an AC End Cable or AC Trunk Cable, which completes the connection between the end of the AC Trunk and the distribution box.	 DC Extension Cable Used to extend the DC connection between the microinverter and PV module when the installation distance exceeds the standard cable length.

Technical Specifications

Connector System Parameter

Pin number	2P + PE
Rated voltage	400 V
Rated current	40 A
Max. supported conductor sizes	6.0 mm ²
Max. supported cable outer diameter	13.5 mm
Ambient temperature range	-40 °C to +85 °C
Protection degree	IP68
Flame resistance degree	UL94-V0
Compliance	RoHS
Product standard	IEC 61984

Cable System Parameter	
Cable type	TC-ER
Rated voltage	600 V
Conductor size	12AWG/10AWG
UV exposure rating	UL1581
Cable flame rating	According to IEC 60332-1-2
Ambient temperature range	-40 °C to +90 °C
Compliance	RoHS
Product standard	E335648(UL)

Connector Ordering Options

Connector Model	Number per Box (PCS)	Box Dimensions (mm)
AC Trunk End Cap	300	460×340×250
AC Trunk Connector	200	460×340×250
AC Trunk Port Disconnect Tool	280	460×340×250
Connector-M	200	460×340×250
Connector-F	200	460×340×250
AC End Connector-12 (Lock screw version)	200	460×340×250
AC End Connector-10 (Lock screw version)	200	460×340×250

Connection Cable Model	Conductors Cross Sectional Area	Rated Current @30 °C ※	Cable Length Between Connectors ※※	Number Per Box	Box Dimensions
AC Trunk Cable-10-240	3 × 6.0 mm ²	40A	2400 mm	15 PCS	460×340×250 mm
AC Trunk Cable-10-200	3 × 6.0 mm ²	40A	2000 mm	15 PCS	460×340×250 mm
AC Trunk Cable-10-160	3 × 6.0 mm ²	40A	1600 mm	15 PCS	460×340×250 mm
AC Trunk Cable-10-120	3 × 6.0 mm ²	40A	1200 mm	15 PCS	460×340×250 mm
AC Trunk Cable-12-240	3 × 4.0 mm ²	32A	2400 mm	15 PCS	460×340×250 mm
AC Trunk Cable-12-200	3 × 4.0 mm ²	32A	2000 mm	15 PCS	460×340×250 mm
AC Trunk Cable-12-160	3 × 4.0 mm ²	32A	1600 mm	15 PCS	460×340×250 mm
AC Trunk Cable-12-120	3 × 4.0 mm ²	32A	1200 mm	15 PCS	460×340×250 mm
AC End Cable-M10-500	3 × 6.0 mm ²	40A	5000 mm	15 PCS	460×340×250 mm
AC End Cable-M12-500	3 × 4.0 mm ²	32A	5000 mm	15 PCS	460×340×250 mm
DC Extension Cable	1 × 4 mm ²	40A	3000mm	50 PCS	460×340×250 mm
	1 × 4 mm ²	40A	2000mm	80 PCS	460×340×250 mm
	1 × 4 mm ²	40A	1000 mm	100 PCS	460×340×250 mm
	1 × 4 mm ²	40A	500 mm	200 PCS	460×340×250 mm

※: Rated Current @55 °C: The given value is typical at 30°C temperature and may differ at different temperatures. To calculate the actual current carrying capacity of the cable at other temperatures, please contact SolaX technical team for more details. Please comply with local standards when designing and installing cables.

※ ※: Cable length can be customized. Please contact SolaX sales team for more details.